

**LONWORKS® Networks Compatible Gateway**



**VRV**  
**System Network Solution**




*Open network integration of VRV  
monitoring and control functions  
into LONWORKS® networks*

# Main Features

## 1 Open Network Integration

Daikin has released a new adapter that requires no additional interfaces nor gateways for connection to LONWORKS® networks equipment and building control systems. LONWORKS® networks are recognised worldwide as the de facto standard within the building controls industry. LON® bus makes it possible to control access, energy management, fire/life/safety, HVAC and lighting etc.

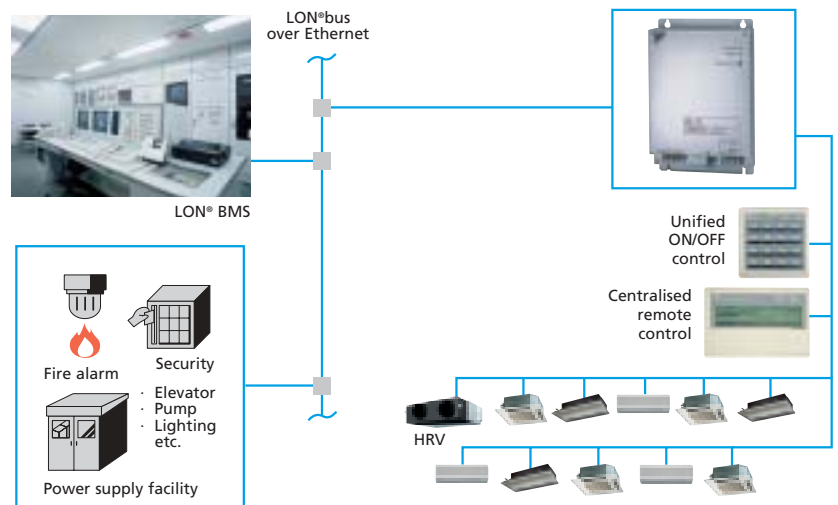

## 2 Quick and Easy Installation

The open protocol specification gives local system integrators complete design freedom. Also, the ability to combine individual items of equipment into a LONWORKS® networks reduces the time and costs required for wiring work

## 3 Unlimited site size

The new network adapter can be connected to up to 64 groups, depending on the number of control and monitoring functions used :

$$600 > (\text{number of indoor units}) \times (\text{number of NV})$$

Maximum value is set by the LON® BMS manufacturer: in this case 600

Number of connected indoor units: 1 ~ 64.

NV: Number of LON® network variables

Please consult your Daikin representative for details.

## 4 Control and Monitoring Functions

### CONTROL:

- ON/OFF command
- Operation mode setting
- Temperature setting
- Fan air flow setting
- Filter sign reset
- Forced thermostat shut off setting
- Remote ON/OFF control rejection
- Remote operation mode control rejection
- Remote temperature control rejection setting
- Forced system shutdown setting
- Timer setting

### MONITORING:

- ON/OFF and error status report
- Operation mode status report
- Temperature setting report
- Room temperature report
- Fan air flow setting report
- Filter sign report
- Error report
- Malfunction code report
- Thermostat status report
- Electricity bill calculation report
- Forced thermostat shut off setting report
- Remote ON/OFF control rejection report
- Remote operation mode control rejection report
- Remote temperature setting rejection report
- Forced system shutdown setting report
- Unit transmission status

## 5 Specifications

Item	Description
LONWORKS® networks compatible Gateway	DMS504B51
Power supply (auto ranging)	1 ~, AC100 ~ 240V, 50Hz
Dimensions (HxWxD)	mm 260x168x50
Weight	kg 1.5
Power consumption	Max. 5W
Operation range	-10 to 50°C
Storage temperature range	-20 to 60°C
Humidity	Up to 95 % (no condensation)
Protocol	LonTalk®
Transmission speed	78kbps
Topology	Free topology
Transmission medium	Twisted pair wire
Installation method	Inside switch boards
Contact input	Forced OFF x 1

## 6 Accessories

Item	Description
Interface adapters	KRP928A2S For connection to Split unit DTA102A51/52 For connection to Sky Air units



**DAIKIN EUROPE N.V.**

Zandvoordestraat 300  
B-8400 Oostende, Belgium  
Internet: <http://www.daikineurope.com>



Daikin Europe N.V. is approved by LRQA for its Quality Management System in accordance with the ISO9001 standard. ISO9001 pertains to quality assurance regarding design, development, manufacturing as well as to services related to the product.



ISO14001 assures an effective environmental management system in order to help protect human health and the environment from the potential impact of our activities, products and services and to assist in maintaining and improving the quality of the environment.

Specifications are subject to change without prior notice



Daikin units comply with the European regulations that guarantee the safety of the product.

VRV products are not within the scope of the Eurovent certification programme

Daikin products are distributed by:

