


2.Product Specifications

2-1 Table



Item	Unit of Measure	AZ09AATEA AZ09FATEA	AZ12AADEA AZ12FADEA	AZ18AAMEB AZ18FAMEB
Type		WINDOW		
Dimension: (Width×Height×Depth)	mm	520×345×515	600×394×595	660×425×730
Voltage	Volt	220-240		
Phase	-	SINGLE		
Frequency	Hz	50		
Operation Current(C/H)	A	4.2/3.9	5.9/5.3	9.4/7.8
Power Consumption(C/H)	W	1010/930	1350/1210	2250/1800
Refrigerant Type	FREON	R22		
Refrigerant Change	g	540	700	1120
Capacity(C/H)	BTU/h	8400/8400	11500/11500	17000/17300
EER(C/H)	BTU/h.W	8.3/9.0	8.5/9.5	8.5/9.5
Net Weight	Kg	35	45	59
Condenser	Row	2×12	2×14	3×15
Condenser Fan	Type	Propeller Fan		
Evaporator	Row	2×12	2×14	2×16
Evaporator Fan	Type	Blower		
Fan Motor	MODEL	YGN61-6C	YGN60-6C	YSK150-4L
Compressor(Rotary)	MODEL	44B092JX1EF	48D129JU1EL	48B180JV2EH
Overload Protect	-	MRA12054-12008	MRA12074-12008	MRA12147-12007
Compressor Capacitor	μ F/VAC	35/450	30/450	40/450
Fan Motor Capacitor	μ F/VAC	3/450	3.5/450	6/450
Fan Speed	RPM	1080/1040/1000	890/860/750	1030/980/930
Thermo Control	-	THERMISTOR		
Air Swing	MODEL	M2LJ49ZV32		M2LJ49ZU32

2-2 Dimensions

2-2-1 Main Unit

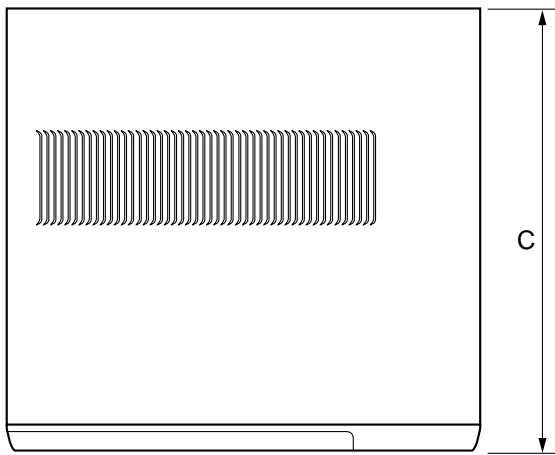

Type	A	B	C
A	520	345	515
B	600	394	595
C	660	425	730

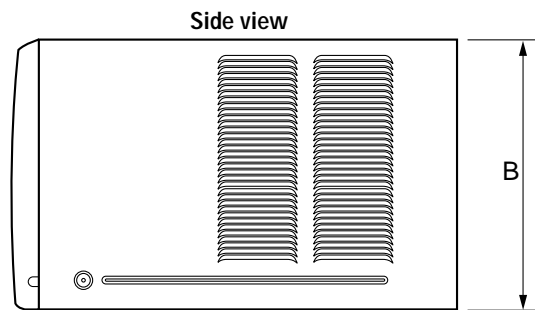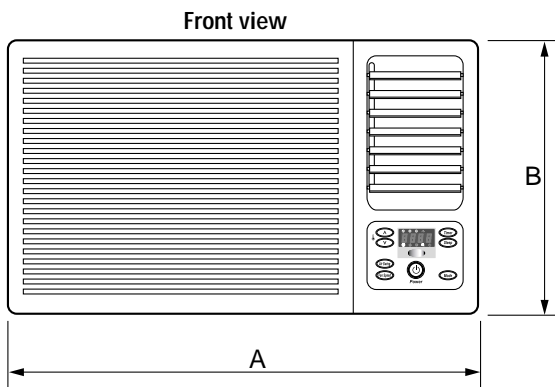

2-2-2 Remote Control

