

## 2. Product Specifications


### 2-1 Table

Item	Unit of Measure	AZ12F1JEA / AZ12A1JEA	AZ18F1MEA / AZ18A1MEA	Remarks
Type	-	Window		
Dimensions: (Width x Height x Depth)	mm	600 x 394 x 595	660 x 425 x 730	
Packing Size (Width x Height x Depth)	mm	708 x 459x 647	723 x 555 x 798	
Voltage:	Volt	220 - 240		
Phase	-	Single		
Frequency	Hz	50		
Operating Current (H/C)	A	5.3 / 5.9	8.5 / 10.0	
Power Consumption (H/C)	W	1,210 / 1,350	1,850 / 2,250	
Refrigerant Type	FREON	R-22		
Refrigerant Charge	g	680	1,130	
Cooling Capacity (H/C)	BTU/h	11,500 / 11,500	16,500 / 17,000	
EER (H/C)	BTU/h.W	9.5 / 8.5	8.9 / 7.6	
Net Weight	kg	45	60	
Condenser	Row	2 x 14	2 x 16	
Condenser Fan	Type	Propeller Fan		
Evaporator	Row	2 x 14	3 x 15	
Evaporator Fan	Type	Blower		
Fan Motor	W	AFS105AUEA	OSME-1404SAC	
Compressor(Rotary)	Model	48A124JV1EL	48B180JV1EH	
Overload Protect	-	MRA12030-12008	MRA12016-12007	
Compressor Capacitor	μF/ VAC	30 / 450	40 / 450	
Fan Motor Capacitor	μF/ VAC	3.5 / 450	6 / 450	
Fan Speed Control	-	Fan speed switch (High & Low)		
Thermo Control	-	Thermostat		

## 2-2 Dimensions



### 2-2-1 Main Unit

(Unit : mm)

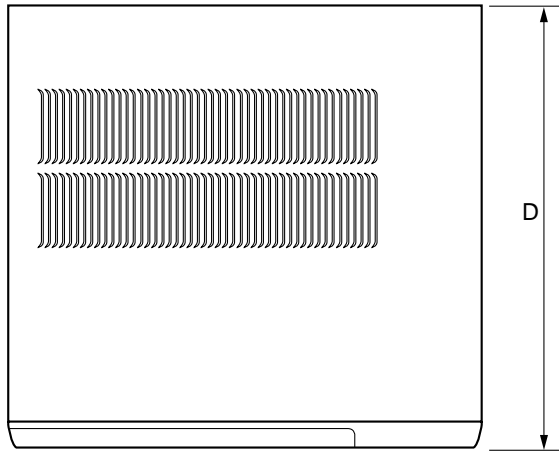

Front view

Side view

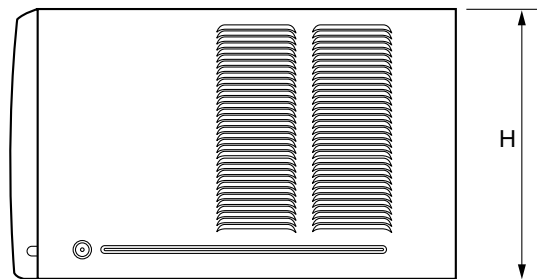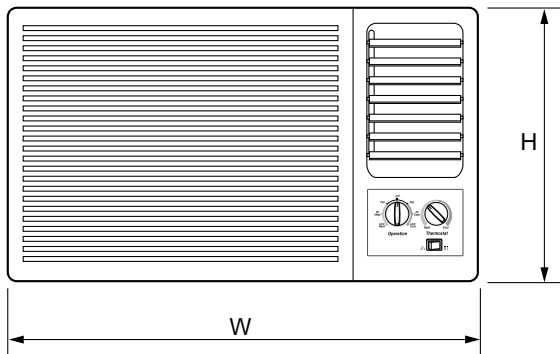

(Unit : mm)

Model	W	H	D
AZ12F1JEA/AZ12A1JEA	600	394	595
AZ18F1MEA/AZ18A1MEA	660	425	730